


- HINGE FOR WINDOWS AND DOORS WITH GROOVE OF 16 (SHAFT 9 AND SHAFT 13).
- FAST ASSEMBLY.
- ADAPTABLE TO THE PROFILE OF THE OPENING FRAME 10X14 / 12X15 / 13X16,5 / 14X18.
- PREASSEMBLED FLANGES, SHAFT AND ASSEMBLED SLEEVES.
- CENTRAL SCREW TO AVOID SLIDING.
- MAXIMUM DIMENSIONS: 1000 X 2000 mm.
- LATERAL SETTING OF +/- 0,7 mm. THANKS TO THE ECCENTRIC SLEEVE. (OPTION)
- WATERPROOF GASKET INCLUDED IN THE OPENING FRAME. (PATENTED)
- MAXIMUM RESISTANCE TO CORROSION.

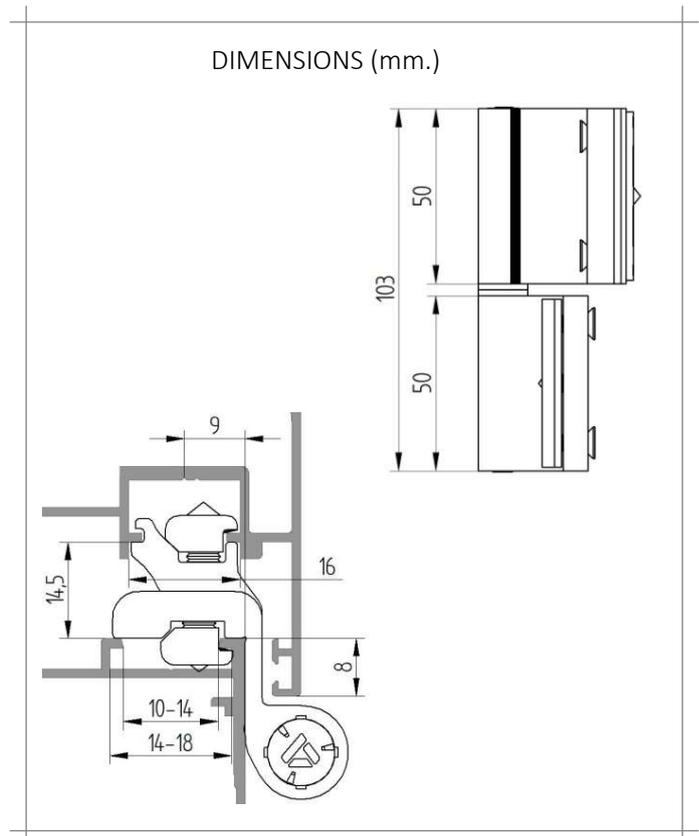

TEST	STANDARD	RESULT
Resistance to corrosion	UNE-EN 1670	Grade 4

MATERIALS	
Frame	Extruded aluminium
Screws	Stainless Steel
Shaft	Stainless Steel
Flange	Zamak
Sleeve	Polyamide

FINISHING TOUCHES AND SURFACE TREATMENTS

BL9016-9010 NOIR 9005 RAL DIVERS 9006 INOX

PACKAGING

50 units with preassembled flanges in a 415x215x60 mm.
Eccentric sleeve available.