


- MAXIMUM LOAD OF 20-80Kg. ACCORDING TO THE NUMBER OF HINGES AND LEAF DIMENSIONS.
- FOR CARPENTRY SERIES WITH A MAXIMUM FRAME THICKNESS OF 40mm.
- EXTREME ENDURANCE.
- MAXIMUM RESISTANCE TO CORROSION.




**DIMENSIONS (mm)**

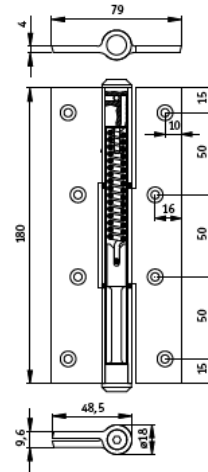

**2 hinges**

**3 hinges**

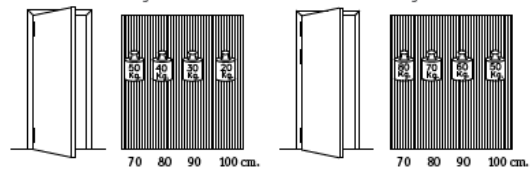

TEST	STANDARD	RESULT
Static load	PE-001	20-80g(*)
Resistance to corrosion	UNE-EN 1670	Grade 4

(\*) According to the number of hinges and the leaf dimensions

MATERIALS	
Frame	Extruded aluminium
Central tube and shaft	Stainless steel
Sleeve	Steel
Stationary shaft	Zamak
Intermediate washer	Polyamide

**FINISHING TOUCHES AND SURFACE TREATMENTS**

WHITE    BLACK    RAL    SILVER    GOLD    BRONZE

**PACKAGING**

1 two-hinge set in a 222x85x47 mm box.