


- FLUSH HANDLE WITH 180° ROTARY LEVER FOR SLIDING SYSTEMS OPERATED BY MULTIPOINT WITH 7 MM SQUARE.
- THE OPENING/CLOSING OCCURS AT 90°, BUT THE LEVER CONTINUES TO ROTATE UP TO 180°, REMAINING FLUSH WITH THE HANDLE AND ALLOWING THE CROSSING OF THE SASHES.
- THE MANEUVERING EFFORT IS REDUCED THANKS TO THE GEAR SYSTEM.
- THE OPEN/CLOSED POSITION IS EASILY IDENTIFIABLE THANKS TO THE SYMBOLS ON THE HANDLE.
- FLANGE FIXATION.
- FIXING DISTANCE 43 MM.
- MINIMUM LEAF WIDTH 43 MM FOR AUDAX MULTIPOINT.* (SEE FORMULA)
- MACHINING OF 187 X 20,5 MM.
- EXTRA-FLAT, ONLY 2,5 MM THICK.




DIMENSIONS (mm.)

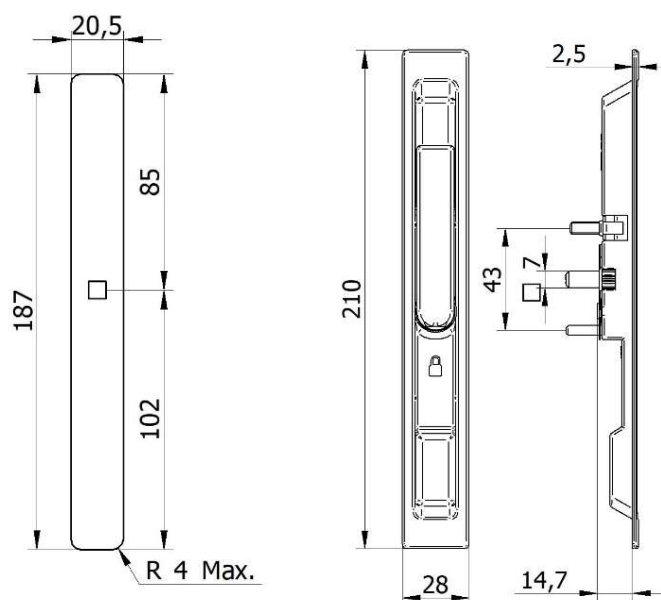

MATERIALS

Chassis, lever and gear	Zamak-5
Shaft, springs, screw	
And counter plate	Stainless Steel
Gear	Sintered Stainless Steel
Nut / Flange	Zinc-plated steel

*X=30+A



SURFACE FINISHES AND TREATMENTS



PRESENTATION

Box of 25 units