


- SAME DESIGN AS THE OPENING FRAME HINGE TO GIVE A SYMMETRICAL ASPECT.
- PRE-ASSEMBLED FLANGES, ASSEMBLED SHAFT AND SLEEVES.
- MAXIMUM DIMENSIONS: 1000 X 2600 mm.
- MAXIMUM LOAD OF 80 Kg. FOR PAIR OF HINGES.
- NO TOOL NEEDED TO ASSEMBLE THE CLIPPED SHAFT
- FAST ASSEMBLY, WITHOUT ANY TEMPLATE.
- MAXIMUM RESISTANCE TO CORROSION.
- ADAPTABLE TO ANY FIXED FRAME DIMENSIONS.

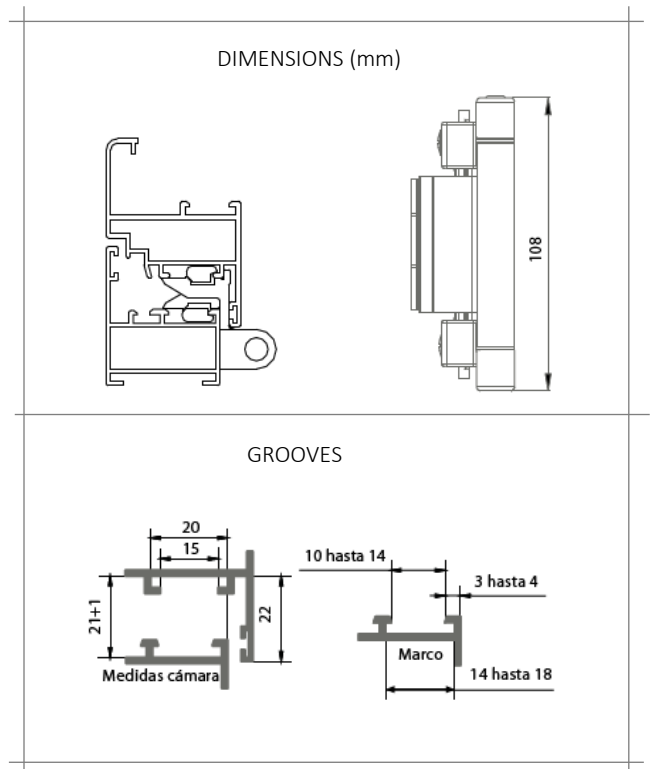

TEST	STANDARD	RESULT
Static load	PE-001	80 kg
Resistance to corrosion	UNE-EN 1670	Grade 4

MATERIALS	
Opening frame hinge	Extruded aluminium
Fixed frame hinge	Zamak
Flanges	Zamak
Sleeves	Polyamide
Shafts	Stainless steel
Screws	Stainless steel

**FINISHING TOUCHES AND SURFACE TREATMENTS**

WHITE    BLACK    RAL    SILVER    GOLD    BRONZE    INOX

**PACKAGING**

10 preassembled hinges packed by sets of 2 units, in a 215x155x100 mm box.