


- ALLOWS TO LOCK THE SECOND LEAF OF THE 2 LEAF WINDOWS.
- REPLACES THE SECOND-LEAF BOLTS.
- COMPATIBLE WHEN LOCKING POINTS ARE LOCATED ON THE TOP AND BOTTOM FRAME.
- SETTING OF THE LEAF-FRAME PRESSION OF 1 mm. WITH THE ECCENTRIC.
- INSTALLATION OF 2 LOCKS (UPPER AND LOWER) IS RECOMMENDED TO IMPROVE THE WINDOWS FIXATION.
- ADAPTABLE TO WINDOWS AND DOORS WITH 16 GROOVE (AXIS 9 AND 13)

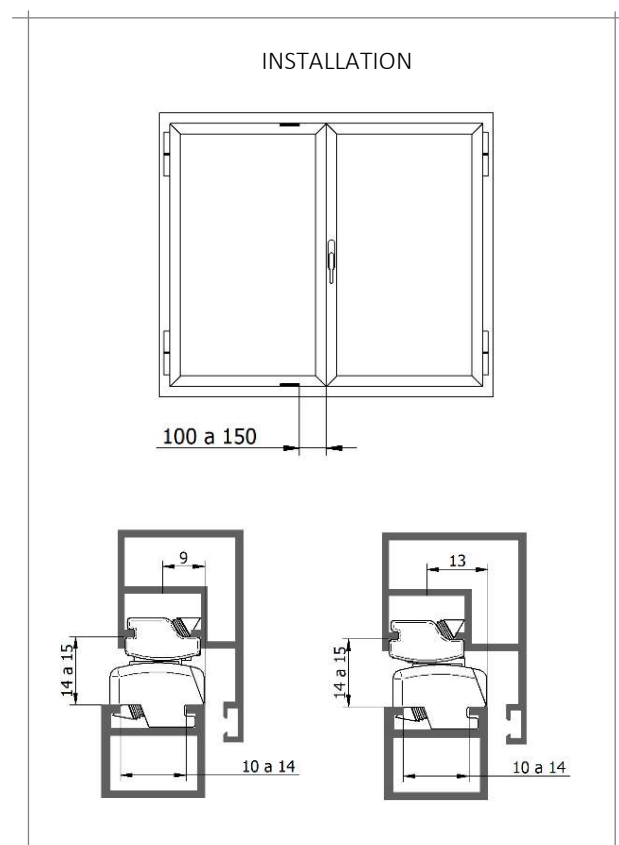

MATERIALS

Housing	Zamak
Base cover	Stainless Steel
Pliers	Zamak
Keeper	Zamak
Eccentric	Zamak
Screws	Stainless Steel

FINISHING AND TREATMENT SURFACE



ZINC-PLATED

PACKAGING

Box of 20 units

